

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 17 TOWNSHIP 16 RANGE 4

DATE: 8-1-04

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison (no cap)



METHOD OF ESTABLISHMENT: County: 8-23-97

IN. S.P.C. E ZONE NAD '83

NAME: 16041701

N: 509877.2447(m)

E: 61032.5910(m)

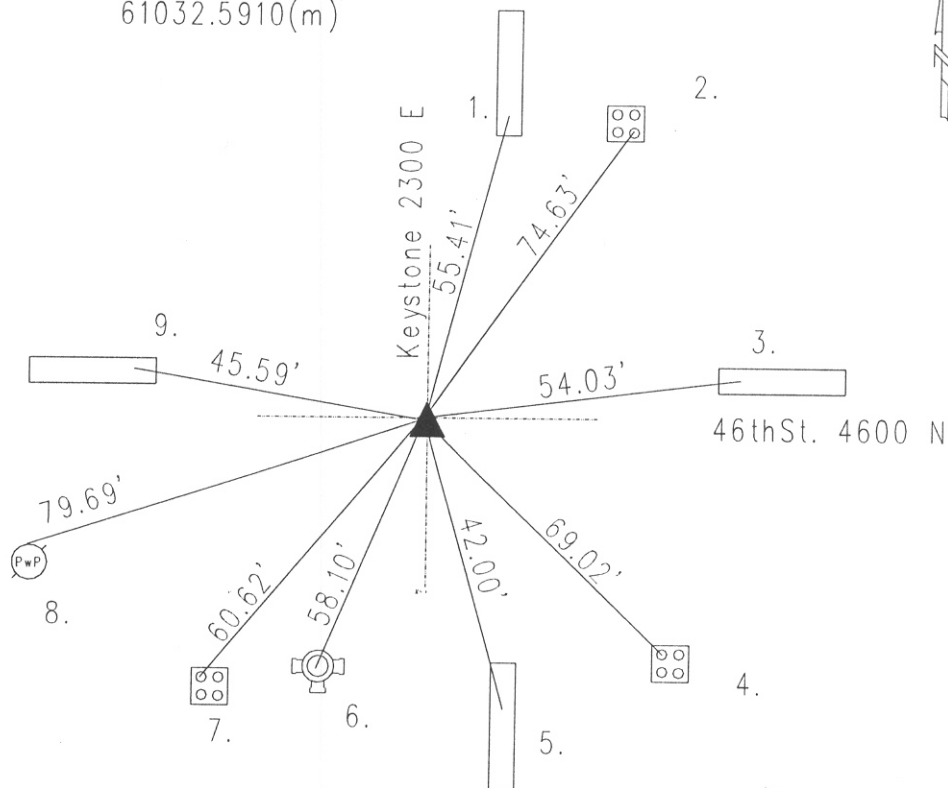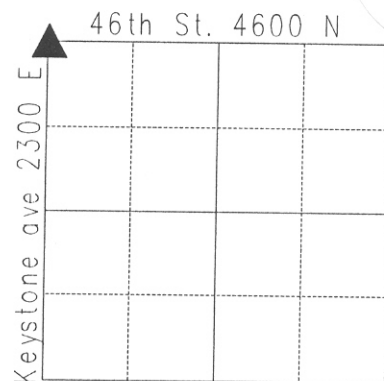

Original post set 1821 by Laughlin with witness: 14" beech S 62 E 27 links, 30" sugar N 28 W 26 links per Marion County Atlas pg. 12. McCulley 2-1&2-1858 called stone with no witness per Washington Township Legal Survey Book pg. 23. Thompson 6-10-47 called 2" galvanized washer. Monroe 11-7-60 called brass plug. Schmidt 12-20-61 called same. Wilcoxon 3-4-76 called same. Gries 8-20-87 called same. Excavated by Wilcoxon 3-10-92 Harrison set. Re-tied 8-23-97 by Wilcoxon. Re-tied 8-1-04 by Wilcoxon.

REF.	DISTANCE	DESCRIPTION
1.	55.41'	Cut 'x' in median
2.	74.63'	Cut 'x' SE bolt of aluminum pole base
3.	54.03'	Cut 'x' in median
4.	69.02'	Cut 'x' NW bolt of aluminum pole base
5.	42.00'	Cut 'x' in median
6.	58.10'	Top nut of fire hydrant
7.	60.62'	Cut 'x' NW bolt of aluminum pole base
8.	79.69'	PK nail w/shiner N PwP#390-369B 6"up
9.	45.59'	Cut 'x' in median